

Figure 2A

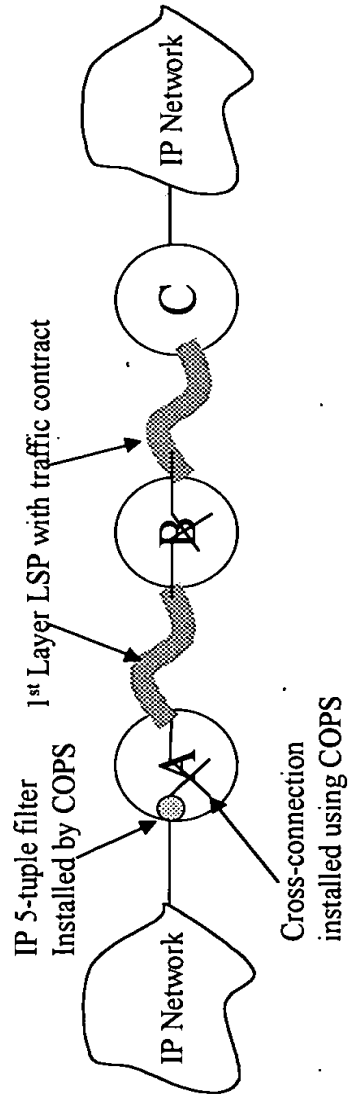


Figure 2B

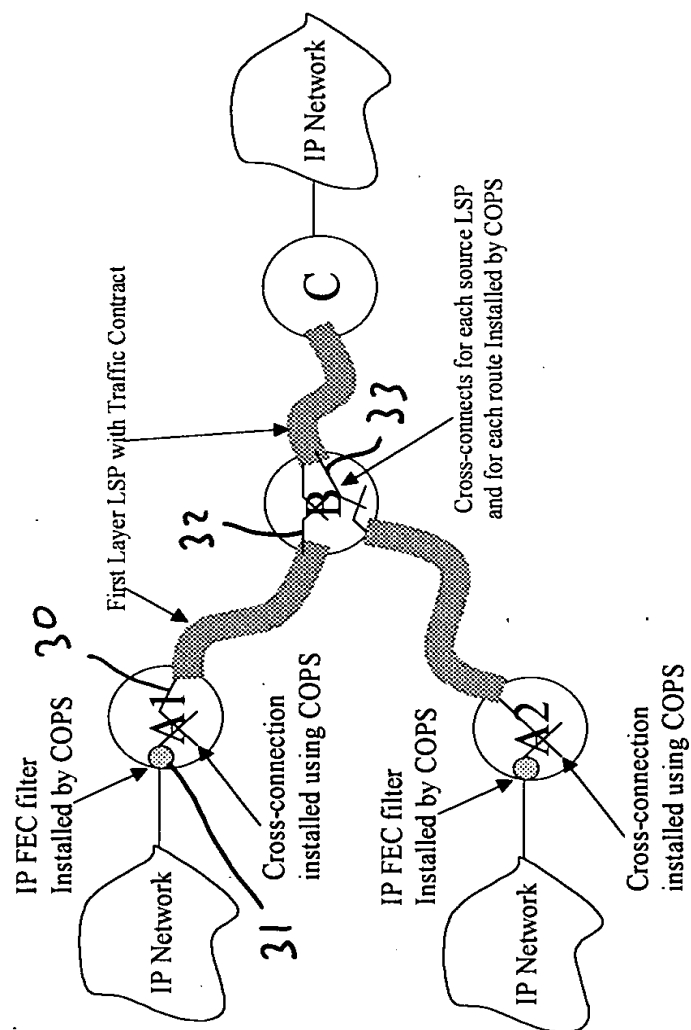


Figure 3


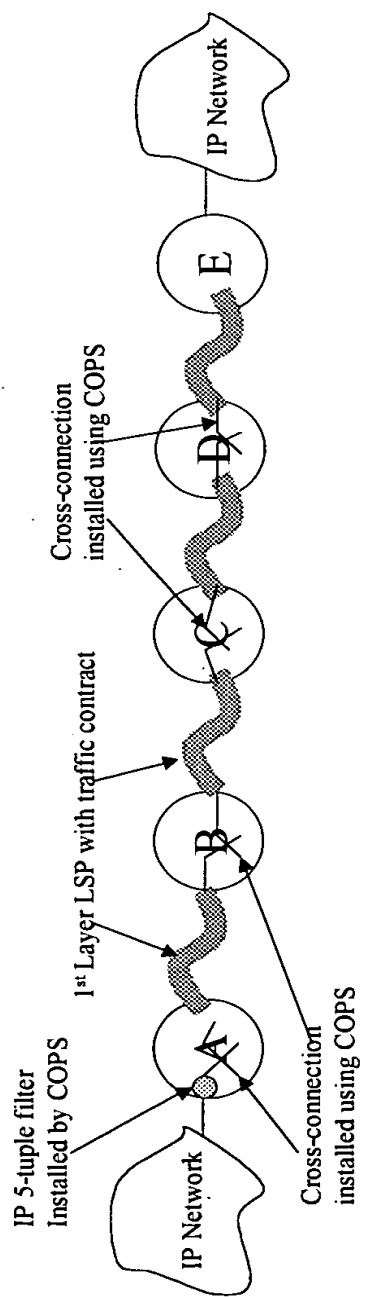


Figure 4

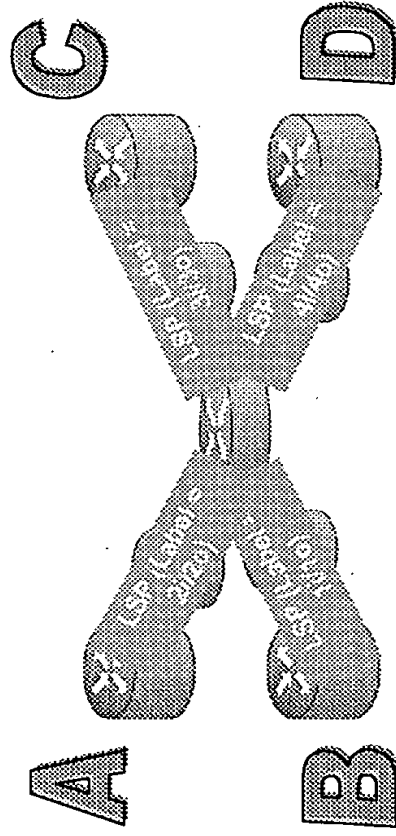

- Use the label assigned to an MPLS LSP as a vector quantity
- Use a stack of such labels to form a vector describing path across a network
- For paths across the illustrated network, the following label stacks would be used:
 - A to D \rightarrow 2i \diamond 2o/4i
 - B to C \rightarrow 1i \diamond 1o/3i
 - B to D \rightarrow 1i \diamond 1o/4i
- Per-LSP bandwidth monitoring permits accurate edge allocation of traffic to each path vector

Figure 5

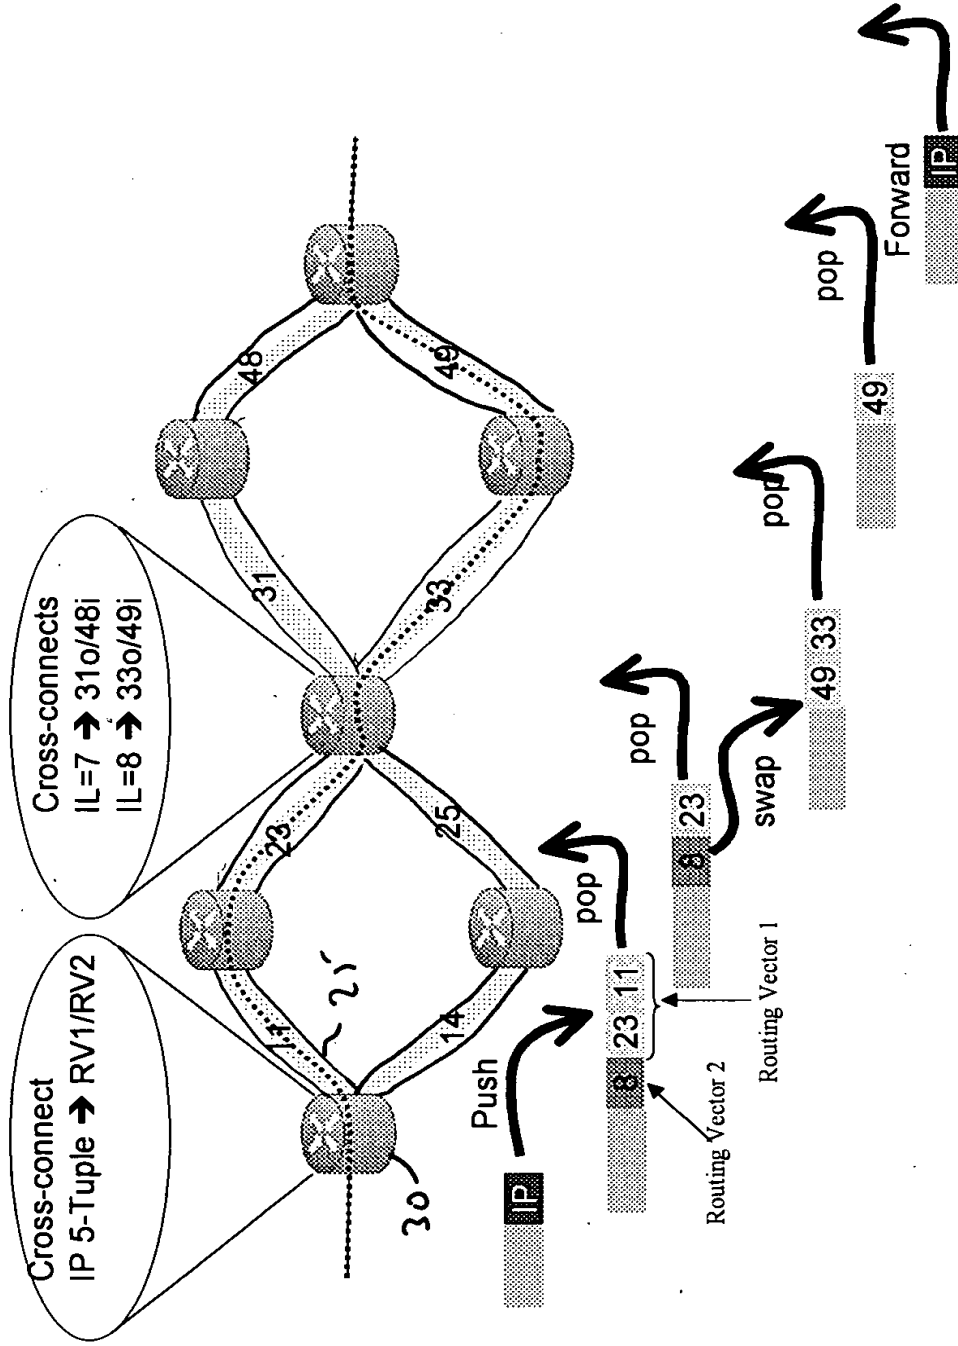


Figure 6

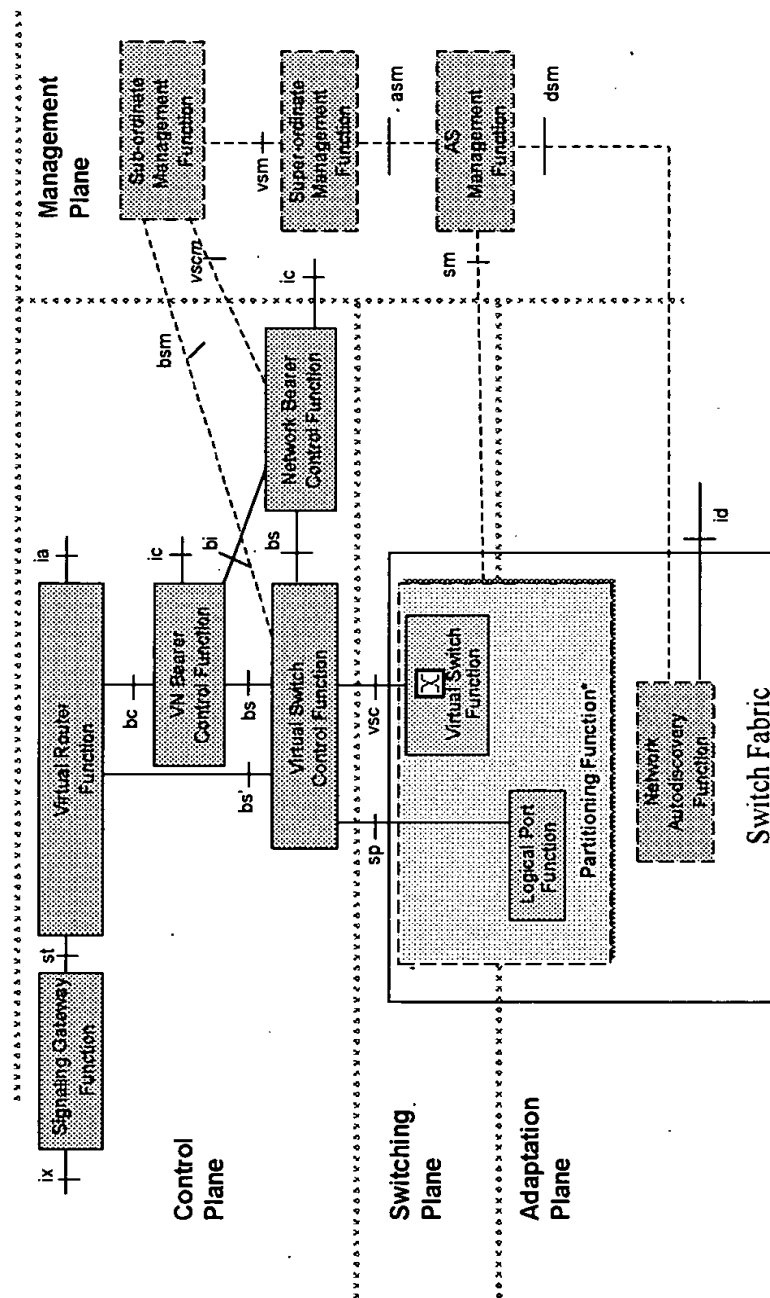


Figure 7

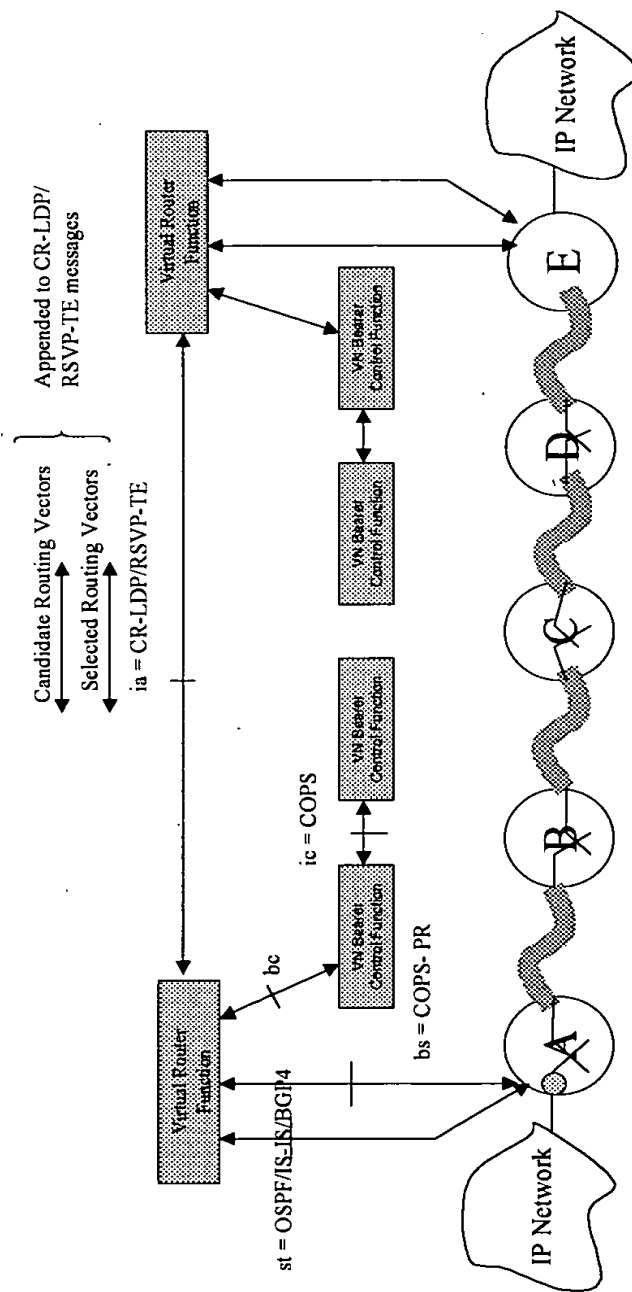


Figure 9

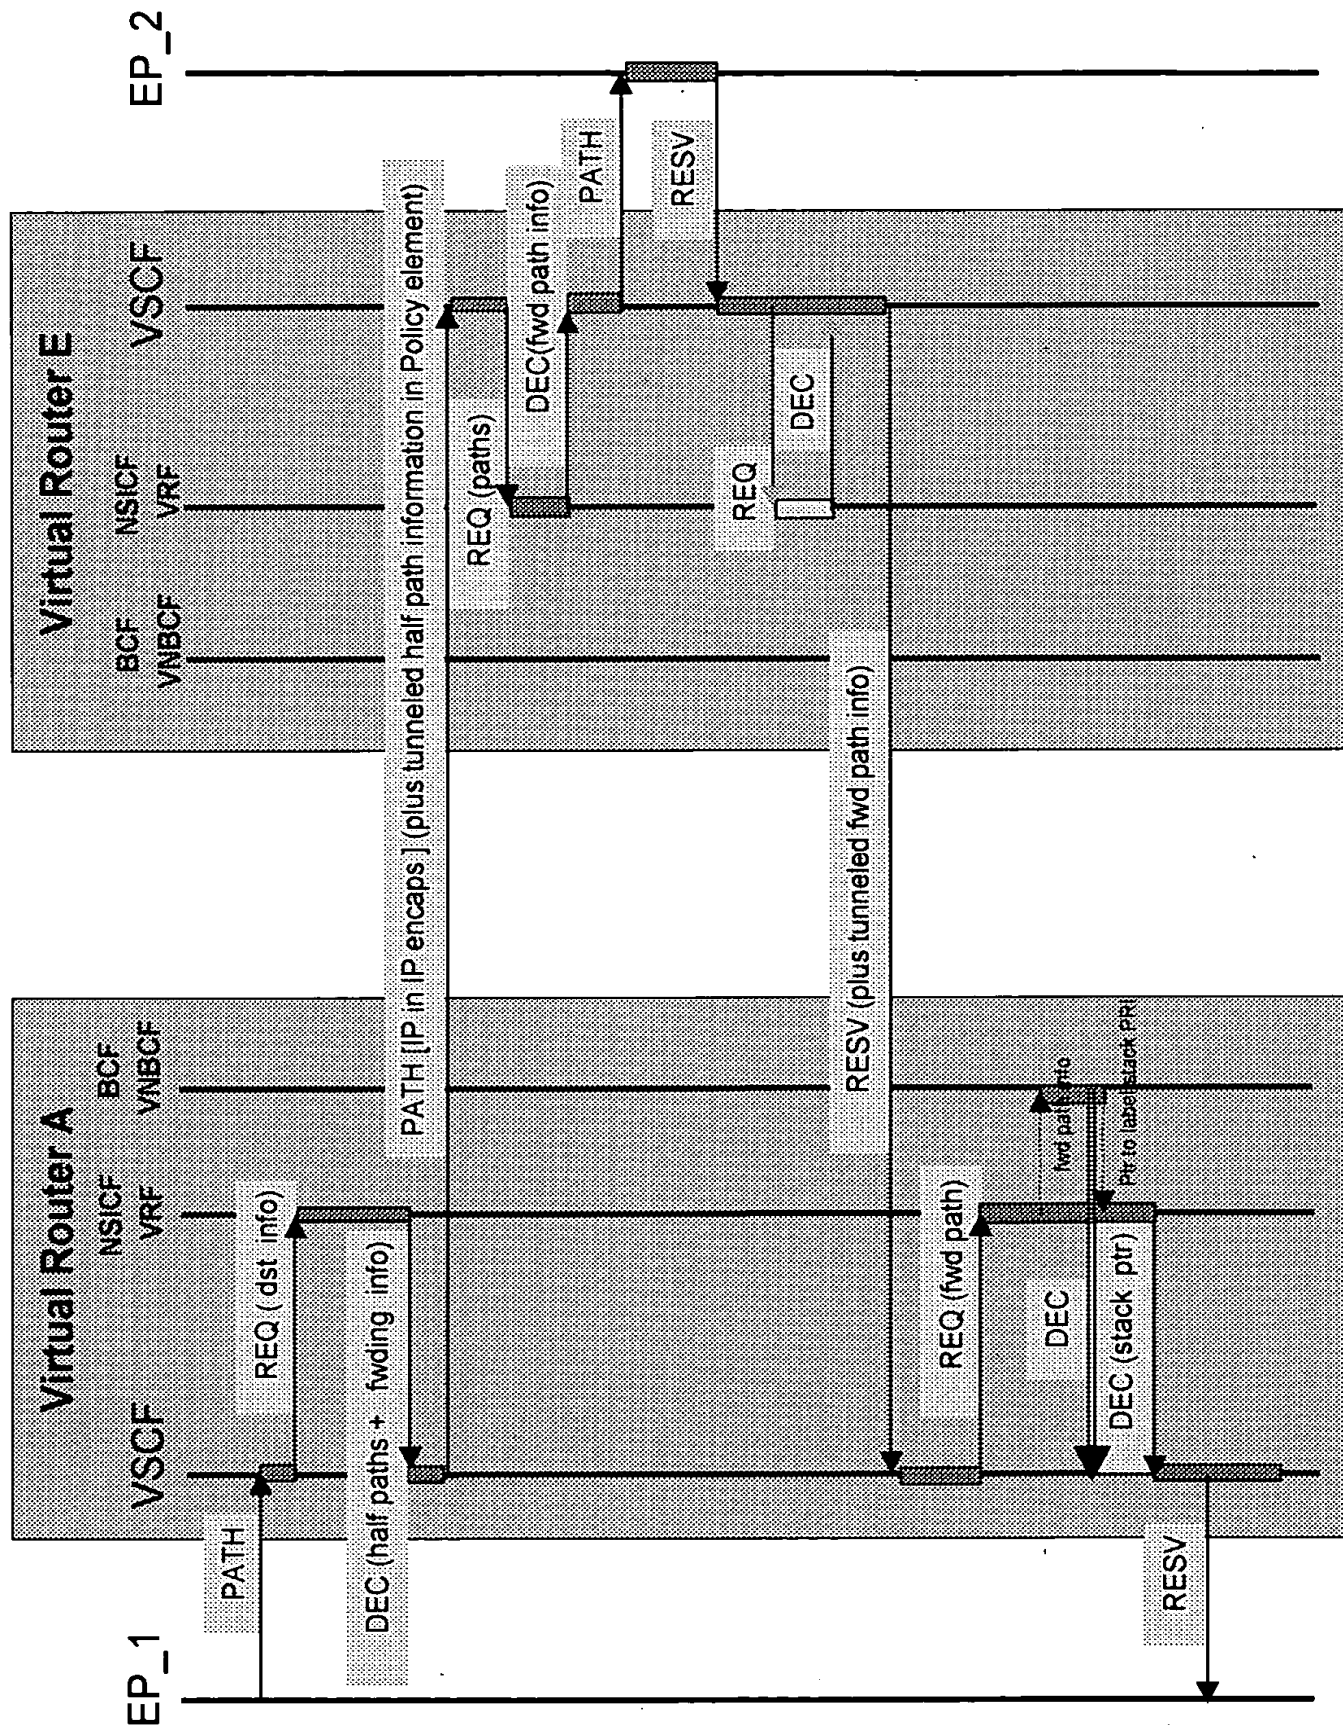


Figure 10

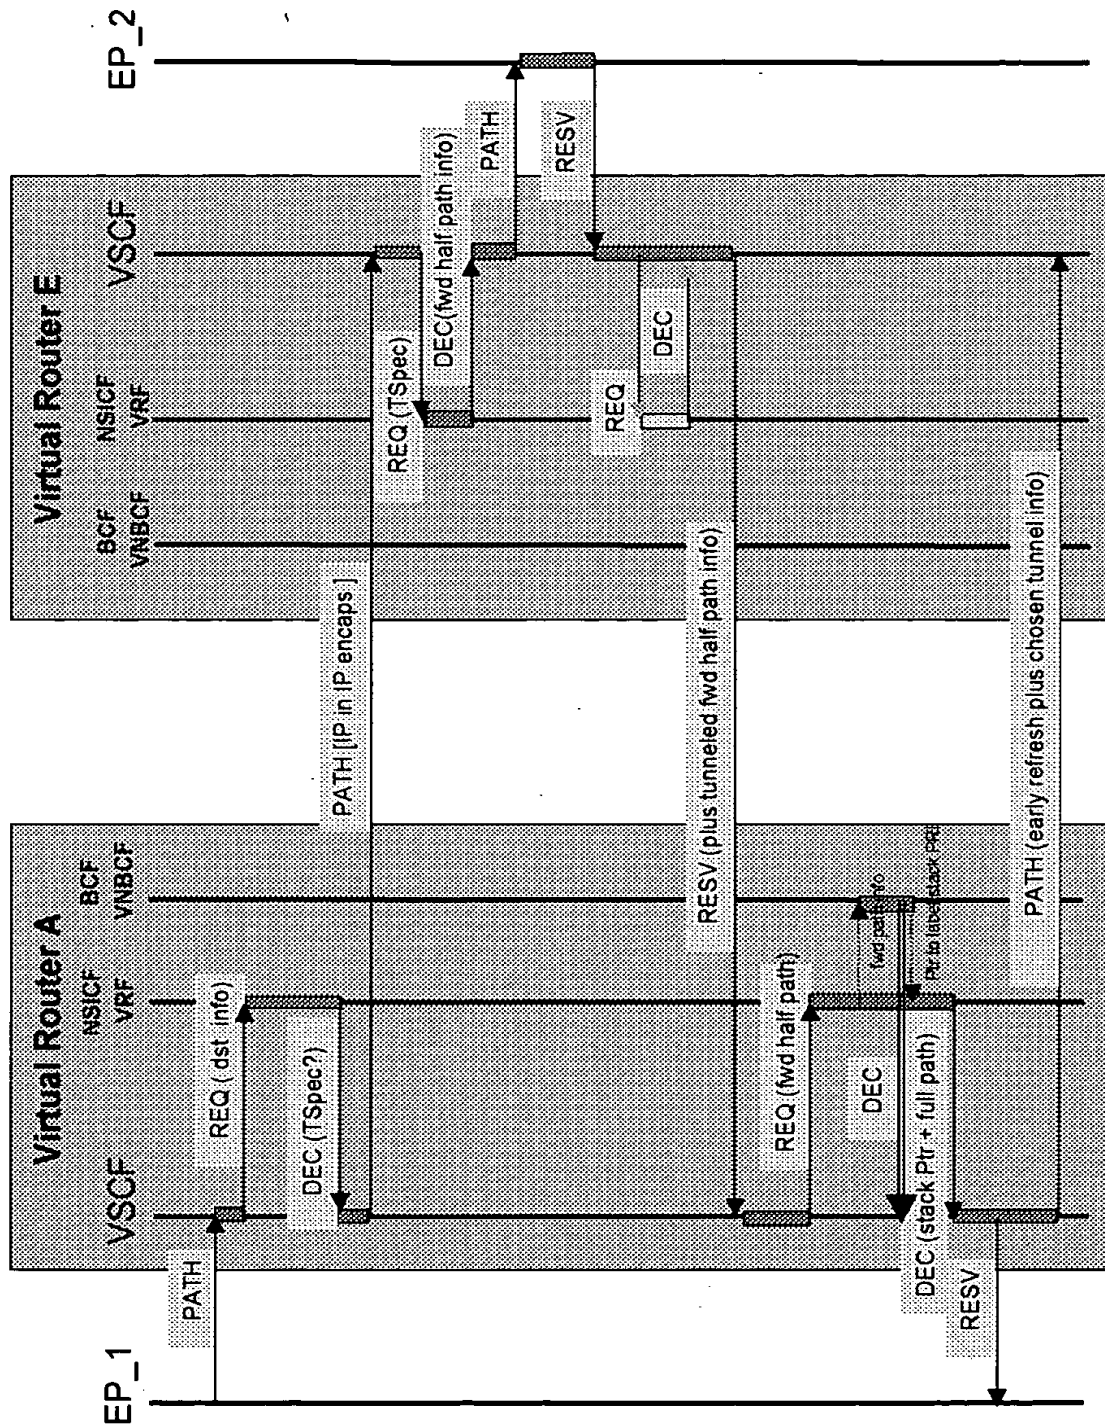


Figure 11